


Linear Flow Controls

GLV

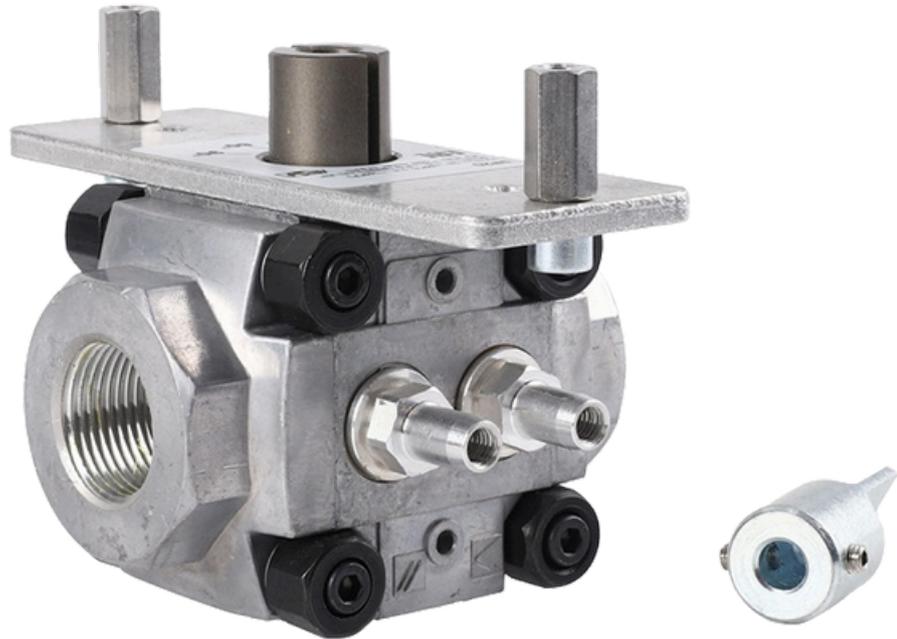

Linear Flow Control

For controlling continuously regulated burner processes, linear ratio between input signal and flow rate, control ratio 25:1, for gas and air, EU certified



Specification

TYPE :	GLV-15R	GLV-20R	GLV-25R
SIZE :	1	1	1
INLET :	DN 15 (1/2")	DN 20 (3/4")	DN 25 (1")
OUTLET :	DN 15 (1/2")	DN 20 (3/4")	DN 25 (1")
PIPE CONNECTION :	Rp internal thread		
INLET PRESSURE :	pu max. 500 mbar (7 psig)		
CYLINDER :	08	15	20
ACCESSORIES, RIGHT :	2 pressure test points		
ACCESSORIES, LEFT :	2 pressure test points		
OPERATING TEMP. :	-20 °C to +60 °C		

